


Machineable ResinMold®

Water Rot Insect Resistant - most sizes available
Minimum Length 10 Feet(3m) Maximum 12 Feet (3.6m)
Minimum Thickness 1/2" (1.2cm) Maximum 2" (5cm)
Minimum Width 2" (5cm) Maximum 12" (30.4cm)

- IPMACH05x2 1/2" x 2" (1.27 x 5.08cm)
- IPMACH05x3 1/2" x 3" (1.27 x 7.62cm)
- IPMACH05x4 1/2" x 4" (1.27 x 10.16cm)
- IPMACH75x2 3/4" x 2" (1.905cm x 5.08cm)
- IPMACH75x3 3/4" x 3" (1.905cm x 7.62cm)
- IPMACH75x4 3/4" x 4" (1.905cm x 10.16cm)
- IPMACH75x5 3/4" x 5" (1.905cm x 12.7cm)
- IPMACH75x6 3/4" x 6" (1.905cm x 15.24cm)
- IPMACH75x8 3/4" x 8" (1.905cm x 20.32cm)
- IPMACH75x10 3/4" x 10" (1.905cm x 25.4cm)
- IPMACH75x12 3/4" x 12" (1.905cm x 30.48cm)
- IPMACH1x2 1" x 2" (2.54cm x 5.08cm)
- IPMACH1x3 1" x 3" (2.54cm x 7.62cm)
- IPMACH1x4 1" x 4" (2.54cm x 10.16cm)
- IPMACH175x2 1-3/4" x 2" (4.445cm x 5.08cm)
- IPMACH175x3 1-3/4" x 3" (4.445cm x 7.62cm)
- IPMACH175x4 1-3/4" x 4" (4.445cm x 10.16cm)
- IPMACH2x2 2" x 2" (5.08cm x 5.08cm)
- IPMACH2x3 2" x 3" (5.08cm x 7.62cm)
- IPMACH2x4 2" x 4" (5.08cm x 10.16cm)



see Casings
Section for
Flexible
Curved
Casing



Use a Router
or Molder
to Make your
own Profiles


Flexible Brickmold



Custom
Made
as per the
radius for
arches


Curves &
Arches

IPBKM100




SuperWiggly
offers the most
flexibility


IPBKM102




IPWM180




IPBKM101




IPBKM103




IPBKM104




IPBKM105




ArchPolymer™ Artificial Wood Straight Length

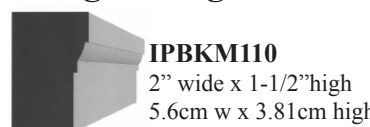

IPBKM110
2" wide x 1-1/2" high
5.6cm w x 3.81cm high



IPBKM111
2" h x 3/4" d x 12 Ft
5.08 x 1.91d x 3.6cm
ArchPolymer
ResinMold

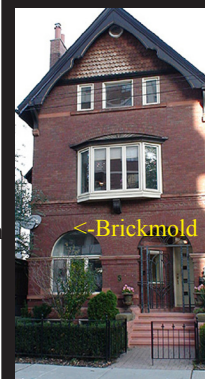

* All prices & specifications subject to change without notice, Final products & Measurements may vary from this brochure



Imperial Productions®

1-800-399-7585

Imperial Productions & Distribution Inc Toronto / New York

email sales@imperialproductions.com copyright 2016 MRDCI All Rights Reserved